


PATLITE[®]
New Frontiers in Safety, Security and Comfort.

Bright and Affordable



Printing Industry

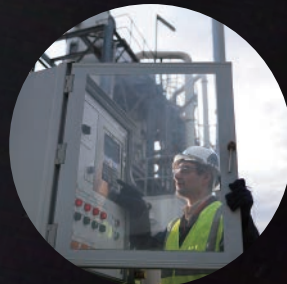

Control Cabinet



Automation Machinery



LED Bar Light

CWA

Line up


6500K

IP65

L:900mm

L:600mm

L:300mm

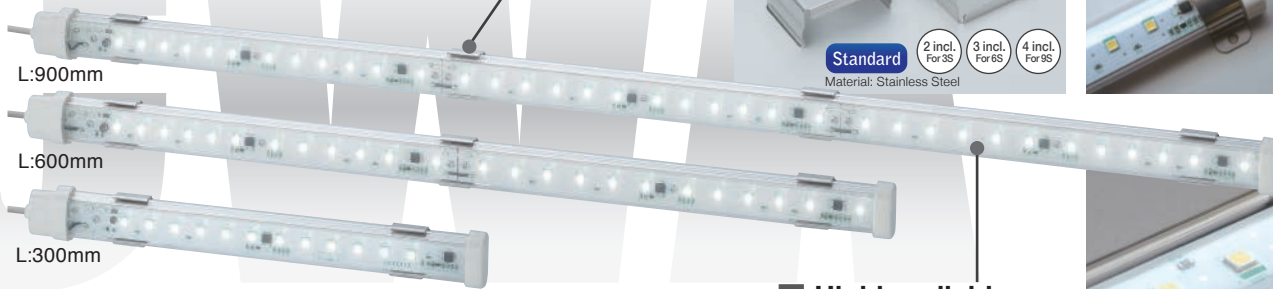

Highly-reliable LED chips are used

Mounting Brackets



Holding Brackets




Cost Saving

Energy
ab. **82.7%**
Less




Based on 10 hrs. per day for 365 days




Earth Friendly

CO2 Emissions
ab. **80.7%**
Less*




Based on 10 hrs. per day for 365 days




Long Life

Lifespan
9
times more




Low Heat

In Comparison
ab. **31%**
Less




Specifications & Outer Dimensions (Unit : mm)


Model	CWA3S-24-CD	CWA6S-24-CD	CWA9S-24-CD
Luminous Color		Daylight	
Color Temperature (Typ.)		6500K	
Illuminance (at 24V DC, 0.5m)	440lx	800lx	990lx
Total Luminous Flux	350lm	700lm	1050lm
Rated Voltage	24V DC (Polarized)		
Operating Voltage	24V DC ±10%		
Current Consumption	180mA	360mA	540mA
Power Consumption	4.32W	8.64W	12.96W
Operating Temperature Range	-30°C ~ +60°C (RH90% or less, no condensation)		
Main Body Material	Polycarbonate Resin (Waterproof Packing: Silicon)		
Protection Rating	IP65 (Excluding cable ends)		
Mounting Location	Indoor		
Mounting Direction	Any Direction		
Insulation Resistance	500V DC 5MΩ or more		
Withstand Voltage	500V AC for 1 minute (Between power cable lead and screw.)		
Vibration Resistance	30Hz 19.6 m/s ² (Back and Forth, Up and Down, Left and Right for 2 hrs. each)		
Mass	215g ±10%	385g ±10%	540g ±10%



CWA9S-24-CD



CWA6S-24-CD



CWA3S-24-CD

Model Code **CWA3S-24-CD**

Model

Color(CD): Daylight

Rated Voltage(24):24V DC

Light Unit Length:(3):300mm (6):600mm (9):900mm



PATLITE ECO PROJECT